



FORMIKO
HYDRAULICS

ROTATOR **FHR 4.500SF/68**

STATIC LOAD



45
kN

DYNAMIC LOAD



25
kN

TORQUE at 25MPa



1300
Nm

WEIGHT



33
kg

OILFLOW



20
l/min

COMPATIBILITY



FHL01-A/B-73/30
FHL01B-A/B-73/30

Rotate left/right
G3/8" Max 250 bar

Grapple open
G3/8" Max 200 bar

Rotator frame L73 Ø30
suitable for Formiko
FHL01 links

Fast maintenance
greasing nipple

Grapple close
G3/8" Max 300 bar

Iron 4 point fitting
system hose guard




Hydraulic motor with
increased torque

Shock resistant steel
flange for reliable fitting
the grapple

Grapple open
G3/8"

Grapple close
G3/8"

Optional open/close channels

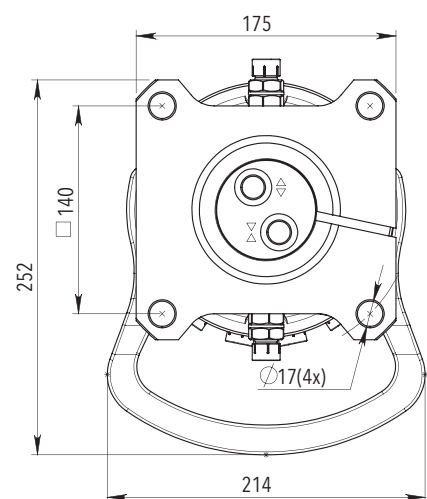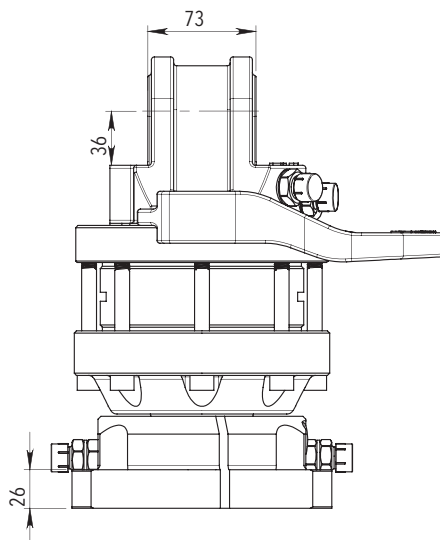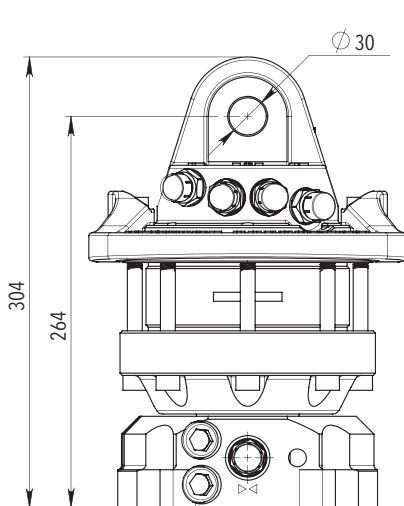

For additional information relating to price levels and technical data, please contact sales@formiko.lv

Formiko Hydraulics Ltd
Dzirciema Str. 119 k-1
Riga LV1055
LATVIA

+371 294 49 552
+371 264 59 383
sales@formiko.lv
www.formiko.lv



Formiko Hydraulics FHR 4.500 are ideal rotator solution for using on medium forestry and agriculture trailers and other applications.

FORESTRY



AGRICULTURE



CONSTRUCTION



GENERAL CARGO



RECYCLING

